



SAC - Part 103 on-condition escalation program

Revision date 23/09/19

Background

Part 103 microlight aircraft are powered by a wide variety of engines- 2-stroke, 4-stroke, ex-certified, uncertified, purpose designed aero, and various auto and utility conversions. Some have manufacturer recommended maintenance schedules, others do not.

The rule governing Part 103 engine maintenance is-

103.217 Maintenance and inspection requirements

(a) An operator of a microlight aircraft must ensure that—

- (1) the aircraft is maintained in an airworthy condition; and
- (2) every applicable airworthiness directive is complied with in accordance with the requirements prescribed in Part 39; and
- (3) between required inspections, every defect is rectified.

(b) An operator of a microlight aircraft that meets a type design standard listed in rule 103.207(a)(1), must ensure that the aircraft is maintained in accordance with the designer or kitset manufacturer maintenance requirements.

AC103-1 further clarifies this rule-

103.217(b) is also straight forward. Most modern microlights are provided with a manufacturer's service or maintenance manual. These manuals will spell out the required inspection intervals and what is required to be done at each of the intervals. If your aircraft was provided with such a document then it must be complied with.

This exposes two issues-

- Many microlights are owner operated with typically low utilisation, and as a result reach calendar life limits well before TIS limits. There are many old, low time engines in service.
- There are also many alternative installations (typically auto and utility engine conversions) with no recommended maintenance schedules.

This document addresses both these issues by introducing a simple, generic maintenance program framework to be followed by the aircraft owner and Inspection Authority, covering all types and allowing extended operation beyond any manufacturer's TIS or calendar limits provided-

- **the engine is maintained to a specified maintenance schedule; and**
- **can be shown to be operating to established baseline parameters;**
= 'on-condition'.

The CAA document granting exemption from the manufacturer's TIS and calendar life limits and enabling this on-condition program is TBA????

What it is

From AC43-4:

On condition maintenance is a preventative process that allows deterioration of components by monitoring those components for their continued compliance with a required standard. The continued satisfactory operation of the structure or component may be determined by inspection, operation, or examination in-situ without detailed dismantling. The necessity to service, recondition, overhaul, or repair is made dependent on the condition.

On condition maintenance should include the assessment of pilot monitored performance, functional checks, and scheduled maintenance, and use circumstantial servicings to carry out opportunity assessments of components. The circumstantial assessments result from other component failures, routine component replacement due to life limitations, and from accidents.

Note: 'Circumstantial' is understood in this context to be 'unscheduled event-driven maintenance'.

For Part 103 aircraft this program makes provision for aircraft engines and their associated components to continue operation beyond manufacturer's recommended TIS or calendar life provided they can be shown to be performing to previously established performance or wear limits.

It also provides for engines without a manufacturer's maintenance schedule or TIS/calendar life limits to enter the program and be maintained and monitored to a common set of standards across the Part 103 fleet.

The aim is to ensure safety and reliability while minimising operating costs by

- avoiding unnecessary work on otherwise serviceable components,
- using evidence based decision making on replacement or overhaul of components.

What is it not

From AC43-4:

On condition is not fit until failure or fit and forget

It is not a licence to take shortcuts, ignore problems, or defer necessary maintenance actions.

How it works

SAC will provide a suite of **routine maintenance schedules** and **performance/wear limits** to cover the variety of engine types fitted. Most of these will be derived directly from the engine manufacturer's published maintenance schedules, others will be more generic covering those engines with no manufacturer's schedule (eg auto conversions, utility engines, special conversions, etc).

SAC will appoint **Authorising IAs** who may inspect and sign off engines to enter this program. They will also specify the routine maintenance schedule and performance and wear limits appropriate to the engine. These Authorising IAs must have the confidence of the Part 149 organisation, and proven experience with the engine types they sign off. They are the gatekeepers into this program.

The **aircraft operator** may then operate the aircraft, following the specified maintenance schedule, measuring and recording the performance/wear measurements.

Following entry to an 'On Condition' program, the aircraft must continue to be subjected to an **annual inspection** by an IA, who must be satisfied from the maintenance records and by direct inspection that all necessary maintenance has been carried out and the engine performance/wear is within the specified limits and can reasonably be expected to perform to specification for the next maintenance period.

Insurance considerations

Some insurers may require that the manufacturer's maintenance schedule be strictly followed, or may impose a premium or excess for engines operating under an on-condition program beyond manufacturer's limits. It is advisable to check with your insurer before entering this program.

Routine maintenance requirements

All engines must be under a routine maintenance schedule as specified by the Authorising IA, with key items being measured, inspected, adjusted or replaced at periodic intervals.

These items will typically be consumables and components that wear with time and use (oil, fluids, filters, plugs, points, rubbers, hoses, valve clearances, etc). The intervals for each component should be selected such that inspections and replacement will occur well before the expected life of each component.

These schedules will typically cover 25/50/100 hour checks as well as annual items.

If a manufacturer's maintenance schedule exists, it must be used as a basis.

Appendix 1 lists some prototype routine maintenance schedules. These are indicative only- more detailed schedules will be developed by SAC as required.

If a component is scheduled for replacement, but on inspection shows no sign of degradation and can reasonably be expected to perform to specification for the next inspection interval, it may be returned to service.

Maintenance activities, measurements and refit/replace decisions must be recorded in the engine log for review by the IA at annual inspection time.

Components with finite life

Components identified by the manufacturer as having a finite life must be replaced as specified,

unless there is a manufacturer's approved test which monitors performance or wear and can reliably detect or predict the onset of accelerated degradation or failure. Such tests and exclusions must be documented in the on-condition maintenance schedule.

Establishing baseline performance

The condition of an engine can be reliably monitored by identifying critical parameters and wear points, and tracking them through the life of an engine to detect and predict any impending degradation or failure.

The routine maintenance schedule should identify those critical parameters and their wear limits appropriate to the engine installation, and those measurements be recorded in the engine maintenance log.

In most cases the engine manufacturer will have published performance parameters and critical wear limits- these must be used where available.

It is recommended that these baseline measurements be taken from new to establish a robust baseline and history of engine performance.

For older engines the preceding 100 hours of measurements will be used to establish baseline performance. If such data is not available, the baselines should be established from similar aircraft/engine/propeller installations.

Appendix 2 lists some prototype baseline performance parameters and wear limits. These are indicative only- more detailed schedules will be developed by SAC as required.

Entering the 'on condition' program

The Authorising IA is the gatekeeper into the program.

To enter the program the Authorising IA must-

- review the maintenance history
- perform a thorough 100 hour level inspection of the engine
- satisfy him/herself of the airworthiness of the engine and its components
- specify the appropriate maintenance schedule and performance/wear limits for the engine
- check conformance to those specified performance/wear limits
- and if acceptable, sign the engine off to enter the program using the On-Condition Approval form
- Record in the aircraft and engine logbook that the engine is now running on-condition
- affix a decal in clear view of the passenger stating "WARNING - The engine in this aircraft is running on-condition in accordance with the SAC On Condition Maintenance Programme" (Appendix 4)
- a copy of the On-Condition Approval form and the specified maintenance schedule and performance/wear limits must be kept with the engine logbook, with a copy sent to SAC and one held by the Authorising IA. (Appendix 5)

Commercial operations exclusion

Aircraft used for hire or reward, including private aircraft placed on line for casual use, are excluded from this program. Private or club owned aircraft operations only.

Engines with undocumented history

An aircraft engine that has an unknown or poorly documented maintenance history must first be assessed on its present condition and reliability before entering the program.

The steps required are-

- The Authorising IA must
 - review the maintenance history (if available)
 - perform a thorough 100 hour level inspection of the engine
 - satisfy him/herself of the airworthiness of the engine and its components
 - specify the appropriate maintenance schedule, performance/wear limits for the engine
 - authorise an endurance test schedule as per 103.211
- On completion of the endurance testing the Authorising IA must
 - repeat a thorough 100 hour level inspection of the engine
 - check conformance to the specified performance/wear limits
 - and if acceptable, sign the engine off to enter the program

Remaining in the 'on condition' program

An engine will remain in this program provided the maintenance logbook carries the following evidence -

- The On-Condition Approval form signed-off by an Authorising IA
- a routine maintenance program and performance/limits specified by the Authorising IA
- all such routine maintenance has been carried out
- all such routine performance/wear measurements have been logged
- a current annual inspection has been signed off by an IA
- the aircraft owner remains a member or client of SAC

Maintenance documentation

All maintenance documentation must be recorded and retained in a maintenance logbook.

Such documentation must include-

- The On-Condition Approval form signed-off by an Authorising IA
- the routine maintenance program and performance/wear limits specified by the Authorising IA
- all maintenance actions and decisions
- all annual inspection sign-offs

It is recommended that as well as recording the performance/wear measurements in the

maintenance log, they should be recorded on a graph with the limit clearly marked. This helps to track performance and predict the onset of failure.

Appendix 3 shows some sample performance/wear graphs.

To facilitate such record keeping SAC will provide logbook inserts with the appropriate routine maintenance schedules, program entry sign-off records, performance/wear limit logs and graphs, and annual inspection forms with fields for recording performance/wear measurements.

Issue/defect reporting

The owner and the IA must report to SAC any significant issues or defects found on engines under this program.

SAC organisation responsibilities

- Provide and maintain routine maintenance schedules for various specific and generic engine types.
- Provide and maintain performance/wear limits or various specific and generic engine types.
- Appoint and equip Authorising IAs.
- Educate and advise members and IAs.
- Review defect reports and issues.
- Monitor and assess the on-condition program.

Authorising IA responsibilities

- Gate-keeping entry sign-off into the program.
- Specify appropriate routine maintenance schedules and performance/wear limits.
- Report issues back to SAC.

IA responsibilities

- Annual inspections and review of performance/wear limits.
- Sign-off for continuation in the program.
- Report issues back to SAC.

Aircraft owner responsibilities

- Maintain the engine in accordance with the specified routine maintenance program
- Monitor and record performance/wear limits as specified.
- Report issues back to SAC and IA

Appendix 1 Sample routine maintenance items

- These are indicative only- more detailed schedules will be developed by SAC as required.
- If a manufacturer's schedule exists, it should be used as a basis.
- For specific installations, add or remove inspection items as appropriate.
- If a component is scheduled for replacement, but on inspection shows no sign of degradation and can reasonably be expected to perform to specification for the next inspection interval, it may remain in service.
- * inspect
- R replace

2-stroke engines

ITEM	25hr	50hr	100hr	Ann.	Comment
Spark-plugs	*	R			
Air filter	*				
Gearbox oil	*		R		
Rotary valve oil	*		R		
Belt tensions	*				
Throttle cables	*				
Propeller bolts/tracking	*				
Coolant	*		R		
Fuel filter		*			
Decarb piston/head		*			
Carb idle/balance		*			
Piston rings		*			
Fuel pump		*			
Carb rubber boots				*	
Head/exhaust bolts				*	
Rubbers, hoses, mounts				*	

4-stroke engines

ITEM	50hr	100hr	500hr	Ann.	Comment
Magnetic plugs	*				
Air filter	*	R			
Spark-plugs	*	R			
Fuel filter	*	R			
Engine oil/filter	R				

Belt tensions	*				
Carb rubber boots				*	
Rubbers, hoses, mounts				*	

Appendix 2 Sample baseline parameters and limits

- These are indicative only more detailed tables will be developed by the Part 149 organisations.

2-stroke engines


ITEM	LIMIT	Comment
Static WOT RPM	>90% of baseline	Indicates engine delivering expected power
Piston end-play	>0.008mm	Rotax specified big end/crank-pin wear limit
Compression test	<90% of baseline	Indicates cylinder/ring seal/wear
Gearbox backlash	>110% of baseline	Crankshaft locked, measure at prop tip

4-stroke engines


Static WOT RPM	<90% of baseline	Indicates engine delivering expected power
Leak-down or Compression test	<90% of baseline	Indicates cylinder/ring/valve seal/wear
Oil filter inspection	evidence of metal	Indicates internal wear
Magnetic sump plugs	evidence of metal	Indicates internal wear
Oil pressure @ cruise	<90% of baseline	Indicates internal wear/oil pump performance
Oil consumption	>110% of baseline	Indicates internal wear
Fuel pressure @ WOT	<90% of baseline	Fuel pump performance
Gearbox backlash	>110% of baseline	Crankshaft locked, measure at prop tip

Appendix 3 Performance and wear monitoring graph examples

WOT RPM log

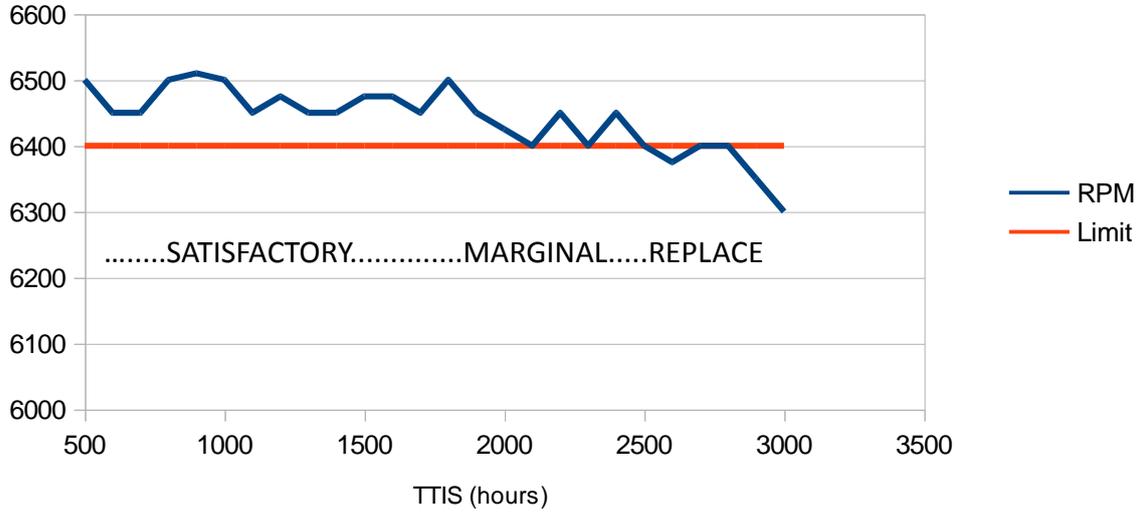

2-stroke piston end play

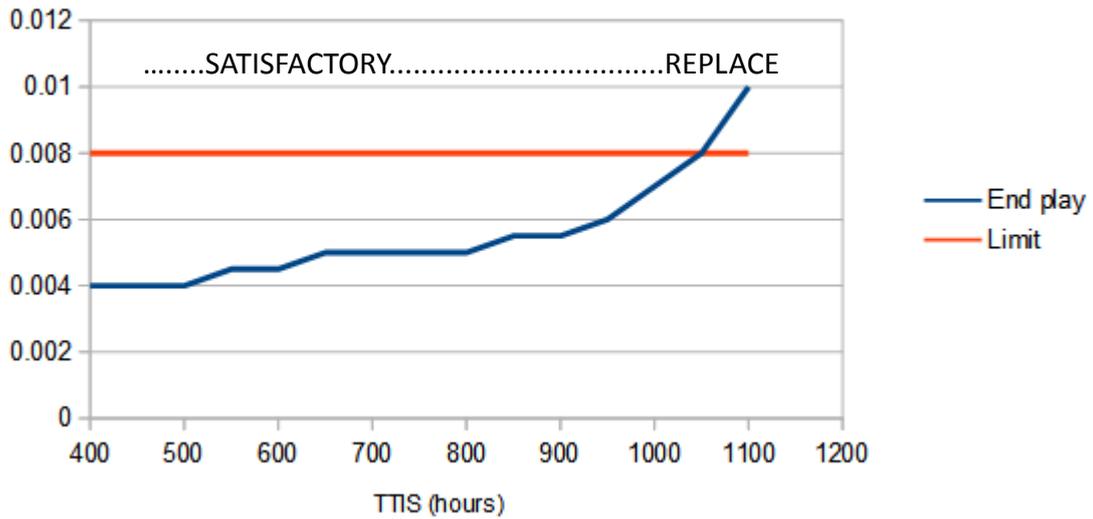

Appendix 4 SAC - Engine On-Condition program approval Form 8.22



Engine On-Condition Program Approval

OCA No: 2001

This document certifies that the following aircraft engine has been approved for maintenance and operation under the SAC On-Condition Program.

This document comprises the following sections, which must be retained in the aircraft engine logbook:

- This approval document;
- The specified maintenance schedule;
- The specified performance and wear parameters and limits.

Engine details			
Type		Calendar age	
Serial number		Total TIS	
Approved maintenance schedule (manufacturer or generic)			
Performance/wear parameters and limits			
Parameter	On entry	Limit	Notes
RPM @ WOT			
Leak-down or compression test			
Oil filter inspection			
Magnetic sump plugs			
Oil pressure @ cruise RPM			
Oil consumption			
Fuel pressure @ WOT			
Gearbox backlash			
Piston end play (2 strokes)			
Approved for entry into the program			
Authorising IA		SAC or RAANZ#	
Signature		Date	

This approval remains valid while the following conditions are met:

- This document is issued and signed by a SAC or RAANZ approved Authorising IA (attached);
- The engine is maintained to the maintenance schedule specified by the Authorising IA (attached);
- The aircraft has a current annual condition inspection;
- The performance and wear parameters specified by the Authorising IA (attached) are measured at each annual condition inspection and recorded in the engine logbook;
- Those performance and wear parameters remain within the specified limits specified by the Authorising IA (attached);
- The aircraft owner remains a current SAC or RAANZ member.

SPORT AVIATION CORP LTD PO Box 10324, Te Rapa, Hamilton 3241 Mobile 021 860 945
 Email info@sportflying.co.nz Website www.sportflying.co.nz

Distribution - BLUE: aircraft owner PINK: SAC WHITE: Authorising IA

Appendix 5 SAC - Engine On condition passenger warning Decal

